

# DRACO II

## LED VAPOR TIGHT LUMINAIRE



PROJECT NAME
ORDERING #



### BENEFITS

- **0-10V dimming compatibility**
- L70 exceeding 168,000 hours
- 87% Driver Efficiency
- Shock & vibration resistant
- Advanced thermal management with LEDs mounted directly to heatsink
- Durable fiberglass housing
- **Passes stringent IP 66 testing** **NOW APPROVED**
- IP 67 rated enclosure
- Powered by LED Living Technology's Claris LED Retrofit Kit
- Modular Components: All internal modules replaceable at end life.
- Patent-Pending Isotropic Diffusion (special order)
- Environmentally friendly: Mercury free, Lead free
- 10 Year Limited Warranty
- **Buy American**



### KEY FEATURES

INPUT WATTAGE	INPUT VOLTAGE		CRI	NOMINAL LUMENS
	120V	277V		
34W 60W	0.33A 0.59A	0.16A 0.29A	Up to 86	Up to 3400 Up to 6000
LUMEN MAINTENANCE			EFFICACY	
L70 reported at >168,000 hours 100% lumen maintenance @10,000 hours			Ribbed Acrylic	- Up to 93 lm/W
			Ribbed Polycarbonate*	- Up to 90 lm/W
			Deep Frosted	- Up to 97 lm/W
			Deep Frosted (WD)	- Up to 84 lm/W
			Ribbed Frosted	- Up to 89 lm/W


### OPTIONS

#### Mounting

Stainless Steel Brackets for Flush Mount; Polycarbonate or Stainless Steel Latches

#### Lenses (overall fixture dimensions with mounting bracket)

- Clear Lineal Ribbed Impact-Resistant (6.77" x 51.81" x 4.26")
- Deep Frosted Lens (6.77" x 51.81" x 5.63")
- Deep Frosted Lens Wide Distribution (6.77" x 51.81" x 5.63")
- Ribbed Frosted Lens (6.77" x 51.81" x 4.26")

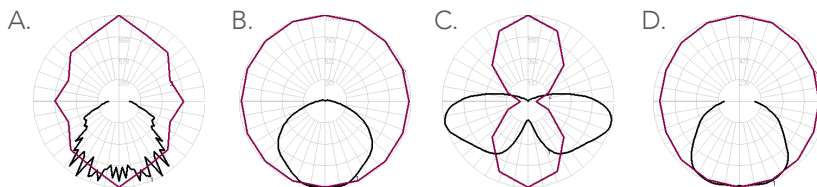

#### Optional Occupancy Sensor

Optional Occupancy Sensor mounted on bracket designed to allow for easy field adjustment. 360° Coverage Pattern; Push-Button Field Programmable; No Minimum Load; Adjustable Time Delays



0-10V dimming compatibility →

### Applications

- Parking Garages\*\*
- Refrigerated Case Lighting\*\*
- Food & drug processing facilities
- Breweries
- Industrial facilities
- Car Washes

\*\*DLC approved applications for this fixture.

### Ordering:

Root	Watts	Strips	LED Color Temp.	Lens	Latches
DRA - Draco II	34 - 34 Watts 60 - 60 Watts	4 - 4 LED Strips 8 - 8 LED Strips	30K - 3000K Color Temperature 35K - 3500K Color Temperature 40K - 4000K Color Temperature 50K - 5000K Color Temperature	RA - Ribbed Acrylic RP - Ribbed Polycarbonate* DF - Deep Frosted RF - Ribbed Frosted	PL - Polycarbonate Latches SL - Stainless Steel Latches CP - Celcon® POM Latches
	<b>Light Distribution</b>	<b>Tamper Resistant</b>	<b>Brackets</b>	<b>Leads</b>	<b>Sensor Option</b>
	WD - Wide Blank - NA	TR - Tamper Resistant Blank - NA	SB - Stainless Steel Mounting Brackets Blank - None	TL - Top-Mounted Leads EL - End-Mounted Leads	OC - Occupancy Sensor Blank - None

#### DLC Listed Model #s (Horizontal Refrigerated Case):

DRA-34-4-40K-RP-XX-XX-XX-XX-XX  
DRA-34-4-40K-RA-XX-XX-XX-XX-XX  
DRA-34-4-40K-RF-XX-XX-XX-XX-XX  
DRA-34-4-40K-DF-XX-XX-XX-XX-XX

DRA-34-4-50K-RP-XX-XX-XX-XX-XX  
DRA-34-4-50K-RA-XX-XX-XX-XX-XX  
DRA-34-4-50K-RF-XX-XX-XX-XX-XX  
DRA-34-4-50K-DF-XX-XX-XX-XX-XX

#### DLC Listed Model #s (Parking Garage):

DRA-34-4-40K-DF-XX-WD-XX-XX-XX-XX  
DRA-34-4-50K-DF-XX-WD-XX-XX-XX-XX

\*Not available in 60W version